



UNIVERSITI PUTRA MALAYSIA

**DESIGN OF POLYMERIC BASED COMPOSITE
AUTOMOTIVE BUMPER FASCIA**

MOHD NIZAM BIN SUDIN

FK 2003 67

**DESIGN OF POLYMERIC BASED COMPOSITE AUTOMOTIVE BUMPER
FASCIA**

By

MOHD NIZAM BIN SUDIN

**Thesis Submitted to the School of Graduate Studies, Universiti Putra Malaysia,
in Partial Fulfilment of the Partial Requirements for the Degree of Master of
Science**

October 2003



**Do you have time to pray?
God has time to listen**

Abstract of thesis presented to Senate of Universiti Putra Malaysia in fulfilment of the partial requirements for the degree of Master of Science

DESIGN OF POLYMERIC BASED COMPOSITE AUTOMOTIVE BUMPER FASCIA

By

MOHD NIZAM BIN SUDIN

October 2003

Chairman: Associate Professor Ir. Hj. Mohd Sapuan bin Salit, Ph.D.

Faculty: Engineering

An automobile bumper fascia is a non-structural component, which contributes to vehicle crashworthiness during front or rear collisions. In the past, the fascia was made of plastic material. The weight reduction in bumper fascia without sacrificing the safety of the car passenger was extensively studied. In this research, the bumper fascia made of polymeric based composite material is designed in solid modelling software. The polymeric based composite material was selected because it can offer low weight, high specific stiffness, high specific strength, high-energy absorption and easy to produce complex shapes. Four conceptual designs of bumper fascia were developed in 3-D solid model. To decide the final design of bumper fascia the matrix evaluation method was used. The weight of bumper fascia was obtained through weight analysis that has been developed by using Pro/Engineer software. The fascia was successfully designed with less weight compared to the current fascia.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia sebagai memenuhi sebahagian keperluan untuk Ijazah Master Sains

REKA BENTUK FASIA BAMPER AUTOMOTIF KOMPOSIT BERASASKAN POLIMER

Oleh

MOHD NIZAM BIN SUDIN

Oktober 2003

Pengerusi: Profesor Madya Ir. Hj. Mohd Sapuan bin Salit, Ph.D.

Fakulti: Kejuruteraan

Fasia bamper automotif adalah salah satu komponen bukan struktur yang menyumbang kepada kemusnahan kenderaan semasa perlanggaran dari hadapan atau belakang. Sebelum ini bamper dihasilkan daripada bahan yang berasaskan plastik. Pengurangan berat fascia bamper tanpa menjejaskan keselamatan penumpang telah dikaji dengan mendalam. Dalam kajian ini fascia bamper yang dihasilkan daripada polimer bahan rencam telah direka bentuk dengan menggunakan perisian permodelan padu. Bahan composite berasaskan polimer telah dipilih kerana ia menawarkan berat rendah, tegasan spesifik tinggi, kekuatan spesifik tinggi, penyerapan tenaga tinggi dan mudah menghasilkan bentuk kompleks. Empat konsep reka bentuk fascia bamper telah dihasilkan dalam model 3-D. Untuk menentukan reka bentuk akhir kaedah penilaian matrik telah digunakan. Berat bamper ini diperolehi daripada analisis berat dengan menggunakan perisian Pro/Engineer. Fasia yang kurang berat berjaya direka bentuk berbanding dengan fascia yang sedia ada.

ACKNOWLEDGEMENTS

In the name of Allah, the most Gracious and most Merciful

Thanks to Allah, for giving permission to complete my thesis. Many people have made contributions to this thesis. I wish to acknowledge my supervisors, Associate Professor Ir. Dr. Hj. Mohd Sapuan bin Salit, Associate Professor Dr. Hajjah Napsiah binti Ismail, and Dr. M.A Malaque for their guidance, supervision and encouragement. Thank you to my friends Mr. Samsi bin Md. Said, Mr. Abdul Malek bin Tajudin, and Mr. Zulkifly bin Naim for their encouragement and assistance in solving problems in related to solid modelling design. I would like to thank to my employer German-Malaysian Institute for the sponsorship. The patience of my beloved wife Khatijah Khalib, my daughter Siti Nur Aqilah, my son Ahmad Zawir Zakwan, my parents and family is highly appreciated.

I certify that an Examination Committee met on 6th October 2003 to conduct the final examination of Mohd Nizam bin Sudin on his Master of Science thesis entitled “Design of Polymeric based Composite Automotive Bumper Fascia” in accordance with Universiti Pertanian Malaysia (Higher Degree) Act 1980 and Universiti Pertanian Malaysia (Higher Degree) Regulations 1981. The Committee recommends that the candidate be awarded the relevant degree. The Members of the Examination Committee are as follows:

Hassan Yudie Sastra, Ph.D.

Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Chairman)

Hj. Mohd Sapuan bin Salit, Ph.D.

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Napsiah binti Ismail, Ph.D.

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Mohd Abdul Maleque, Ph.D.

Lecturer
Faculty of Engineering
Universiti Malaya
(Member)



GULAM RUSUL RAHMAT ALI, Ph.D.

Professor/ Deputy Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 29 JAN 2004

This thesis submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfilment of the partial requirements for the degree of Master of Science. The members of the Supervisory Committee are as follows:

Hj. Mohd Sapuan bin Salit, Ph.D.

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Napsiah binti Ismail, Ph.D.

Associate Professor
Faculty of Engineering
Universiti Putra Malaysia
(Member)

Mohd Abdul Maleque, Ph.D.

Lecturer
Faculty of Engineering
Universiti Malaya
(Member)



AINI IDERIS, Ph.D.
Professor/ Dean,
School Graduate Studies,
Universiti Putra Malaysia.

Date: 25 FEB 2004

DECLARATION

I hereby declare that the thesis is based on my original work except for quotations and citations, which have been duly acknowledged. I also declare that it has not been previously or concurrently submitted for any other degree at UPM or other institutions



MOHD NIZAM BIN SUDIN

Date: 8/2/2004

TABLE OF CONTENTS

	Page
DEDICATION	ii
ABSTARCT	iii
ABSTRAK	iv
ACKNOWLEDGEMENTS	v
APPROVAL	vi
DECLARATION	vii
LIST OF TABLES	xii
LIST OF FIGURE	xiii
 CHAPTER	
1 INTRODUCTION	
1.1. Background	1
1.2. Research aims and objectives	2
1.3. Structure of the thesis	3
 2 LITERATURE REVIEW	
2.1. Introduction	4
2.2. A Brief Description of Bumper Systems and Components	6
2.2.1. Metal Face Bar System	8
2.2.2. Plastic Fascia and Reinforcing Beam System	9
2.2.3. Plastic Fascia, Reinforcing Beam and Mechanical Energy Absorbers System	9
2.2.4. Plastic Fascia, Reinforcing Beam and Energy Absorption System	10
2.2.5. Fascia	10
2.2.6. Energy Absorber	11
2.2.7. Bumper Beam	12
2.3. Manufacturing of Bumper Systems	14
2.4. Review of Polymer Based Composite Bumper System	15
2.5. Materials for Composite Bumper Beams	21
2.6. Information Technology (IT) Tools used in the Research	25
2.7. Advantages and Disadvantages of Polymer Based Composite and Steel Materials Bumper System	27
2.8. Summary	28

3	DESIGN METHODOLOGY OF POLYMERIC COMPOSITE AUTOMOTIVE BUMPER FASCIA	
3.1.	Introduction.	29
3.2.	Proposed Design Methodology	31
3.3.	Proposed Structure of the System	31
3.3.1.	Design Technique and Tools	31
3.3.2.	Product Design Specifications	33
3.3.3.	Conceptual Design of Bumper Fascia	35
3.3.4.	Detail Design of the Polymeric Based Composite Bumper Fascia and Weight Analysis	37
3.4.	Material Selection for Fascia	38
3.5.	Remark	39
4	CONCEPTUAL DESIGN OF POLYMERIC COMPOSITE BUMPER FASCIA	
4.1.	Introduction	40
4.2.	Polymeric-Based Composite Automotive Bumper System	41
4.3.	Creativity Methods In Conceptual Design	42
4.4.	Product Design Specification	46
4.4.1.	Performance	48
4.4.2.	Materials	49
4.4.3.	Environment	49
4.4.4.	Aesthetic	49
4.4.5.	Weight and Size	50
4.5.	Concept Development	50
4.5.1.	Mindmapping...	50
4.5.2.	Analogy in Fascia Design	54
4.5.3.	Brainstorming in Fascia Design	54
4.5.4.	Random Input in Fascia Design	55
4.5.5.	Why? Why? Why? in Fascia Design	55
4.5.6.	The Morphology Chart	55
4.6.	Bumper Fascia Concepts	57
4.6.1.	Final Concept	57
4.6.2.	Weighted Objective Method for Evaluation of Alternative Concept of Bumper Fascia	62
4.7.	Conclusion	65
5	DETAIL DESIGN OF POLYMERIC BASED COMPOSITE MATERIALS BUMPER FASCIA	
5.1.	Introduction	66
5.2.	Solid Modelling Design for Bumper Fascia	66
5.3.	Bumper Fascia Design	67
5.4.	Weight of Bumper Fascia	73
5.5.	Conclusion	75

6 CONCLUSION AND RECOMMENDATIONS	
6.1. Conclusion	76
6.2. Recommendation	77
 REFERENCES	 78
 APPENDIX 1	 82
 VITAE	 84

LIST OF TABLES

Table		Page
2.1	Advantages and disadvantages matrix	27
4.1	Weighted Objective Method for Evaluation for Bumper Fascia	63
4.2	Characteristics of Concept Design of Bumper fascia	64
5.1	The Volume, Weight of Bumper Fascia	73
5.2	Characteristics of Proposed Design and Existing Design of Bumper fascia.	73

LIST OF FIGURES

Figure		Page
2.1	Four Different Types of Automotive Bumper System	7
2.2	Automotive Bumper System Components	10
3.1	Design Model for Automotive Bumper Fascia	30
3.2	The Architecture of the Research on the Polymeric Based Composite Bumper Fascia	32
3.4	Activities in Conceptual and Detail Design Stage	36
4.1	The Architecture of the Relationship between Conceptual Design with others Activities	44
4.2	Front View of Existing Fascia	45
4.3	Back View of Existing Fascia (with foam)	45
4.4	The PDS of Automotive Bumper Fascia	48
4.5	A Mindmapping of the Design Applications of the Conceptual Design of the Front Bumper Fascia Studied	53
4.6	The Morphology Chart for the Bumper Fascia	56
4.7a	Bumper Fascia (Concept-1)	58
4.7b	Bumper Fascia (Concept-2)	59
4.7c	Bumper Fascia (Concept-3)	60
4.7d	Bumper Fascia (Concept-4)	61
5.1	Final Design of Polymeric Based Composite Bumper Fascia in 3-D Solid Model	69
5.2	Front View of Bumper Fascia	70
5.3	Side View of Bumper Fascia	71
5.4	Top View of Bumper Fascia	72

CHAPTER 1

INTRODUCTION

1.1 Background

The use of polymer-based materials in automotive industry has raised dramatically in recent years, as its offer low weight, corrosion free, easier to produce complex shapes, high specific stiffness (stiffness/weight), high specific strength (strength/weight), and high impact energy absorption characteristic over their metal counterparts. One of the important structural to absorb the collisions energy and the impact energy is bumper system. The bumper system consist of three components namely bumper beam, energy absorber and bumper fascia. There is an interest among the researcher to move from conventional material such as plastic, aluminium, or steel to cheaper materials such as polymeric based composites in bumper system. In this study, the use of polymeric based composite material for bumper fascia is proposed for the quest of high fuel efficiency in automobiles, cheaper, and having comparable properties to conventional fibres without sacrificing the safety of cars.

Substitution of the polymeric based composite material for bumper fascia is suggested mainly to improve the bumper system performance as it can offer lightweight as well as to reduce the energy consumption. Therefore, automotive bumper fascia made of polymeric based composites material will be designed and

analyzed to investigate the effect of weight as well as the overall performance of automotive bumper systems. The front-end bumper fascia of proton Iswara aeroback 1.3 is selected to be the subject of this study. It is selected mainly due to certain shortage in the current design such as attachment method of fascia to the body of the car, weight, and appearance of the bumper fascia. The study purposely to improve all the shortages arises.

1.2 Research Objectives

The major objectives are:

- to apply proper design method to design automotive bumper fascia.
- to design bumper fascia made of polymeric based composite material using solid modelling software
- to investigate the weight of bumper fascias made of polymeric based composite

1.3 Structure of the Thesis

Literature review in various relevant areas is presented in chapter 2. The review started with the brief description of the components and bumper system. The review than explain the manufacturing of bumper systems and polymeric based composite bumper system and it is end with the comparison between polymeric based composite material with conventional material. The structure and methodology of design process is described in chapter 3. It concentrates on the propose design methodology for the design system, tools required for the design,

and product design specification (PDS) of bumper fascia. The conceptual design of polymeric based composite for bumper system is described in chapter 4. It comprises on the generating, developing and design evaluation of automotive bumper fascia for achieving final design concept.

Chapter 5 deals with the detail design of the composite bumper system. This chapter comprises two main parts, the component design, and design analysis. The component design was developed using computer aided design software. Design analysis is mainly for design decision and verification. The weight analysis is performed using Pro/Engineer software. Final model was developed, which is in 3-dimensional (3D), to achieve the optimised weight of bumper fascia.

In the chapter 6, conclusion is made on the design aspect of fascia design and recommendations for the future improvement are identified and explained.

CHAPTER 2

LITERATURE REVIEW

2.1 Introduction

Automobile bumper is a structural component of an automotive vehicle, which contributes to vehicle crashworthiness or occupant protection during front or rear collisions. The bumper systems also protect the hood, trunk, fuel, exhaust and cooling system as well as safety related equipments. A brief description of bumper components and a critical review of polymer-based bumper systems with specific methodology are described. This chapter led to a proposal for proper bumper design and material selection, which provides better understanding of automotive bumper systems. The aim of this review is also to attempt to provide the information about scientific systems components and to offer a critical review of bumper materials. The advantages and disadvantages of polymer based composite materials compared with the traditional steel were also discussed.

A bumper is a shield normally made of aluminium, steel rubber, composite or plastic that is mounted on the front and rear of an automobile vehicle. When a low speed collision takes place, the bumper system absorbs the shock or energy to prevent or reduce damage to the vehicle. In some bumpers energy absorbers or brackets are used and others are made with foam cushioning material.

The car bumper is designed to absorb energy thus to prevent or reduce physical damage to the front and rear ends of an automobile at low speed collisions. Automobile bumpers are not usually designed to be structural components that would significantly contribute to vehicle crashworthiness or occupant protection during front or rear collisions at high speed. The bumper should be designed as safety feature since it is intended to reduce the magnitude of deceleration during impact. The bumper systems are only designed to protect the hood, trunk, frame, fuel, exhaust and cooling system as well as safety related equipments, such as parking lights, headlamps and taillight at low collisions.

Bumper systems have been changing drastically over the last 20 to 30 years. More demanding government safety regulations and different styling concepts have resulted in new designs. For example, reinforcing beams covered by plastic fascias were introduced in the early 1970's. Styling fashion has changed appearance values from almost 100% chrome-plated face bars to predominately fascia system that are colour coordinated with the body. The growth of light trucks, minivans and sport utility vehicles have created two classes of bumper systems in the eyes of the engineering world: one for passenger cars and another for the broad grouping of light trucks. Safety concerns have resulted in the bumper beam becoming a part of the structural load path (Kelman et al.,1990).

There are several factors to be considered when selecting a bumper system. The most important consideration is the ability of the bumper system to absorb enough energy to meet the original equipment manufacturers (OEM's) internal bumper

standard (Bernert et al., 2001). Another is the requirement to stay intact at high-speed impacts. Weight, manufacturing process ability and cost are also the factors that have to be considered during the design phase. Both initial bumper cost and repair cost are important. The formability of materials is important for high-sweep bumper systems. Another factor considered at the material selection stage is recyclability of materials, which is an advantage for steel, but yet the evolution of Carbon dioxide (CO₂) during recycling or re-melting of steel has to be taken into consideration.

2.2 A Brief Description of Bumper Systems and Components

There are four different types of bumper systems commonly used in the automotive vehicles as shown in Figure 2.1(Bernert et al., 2001). A brief description of each system is as follows:

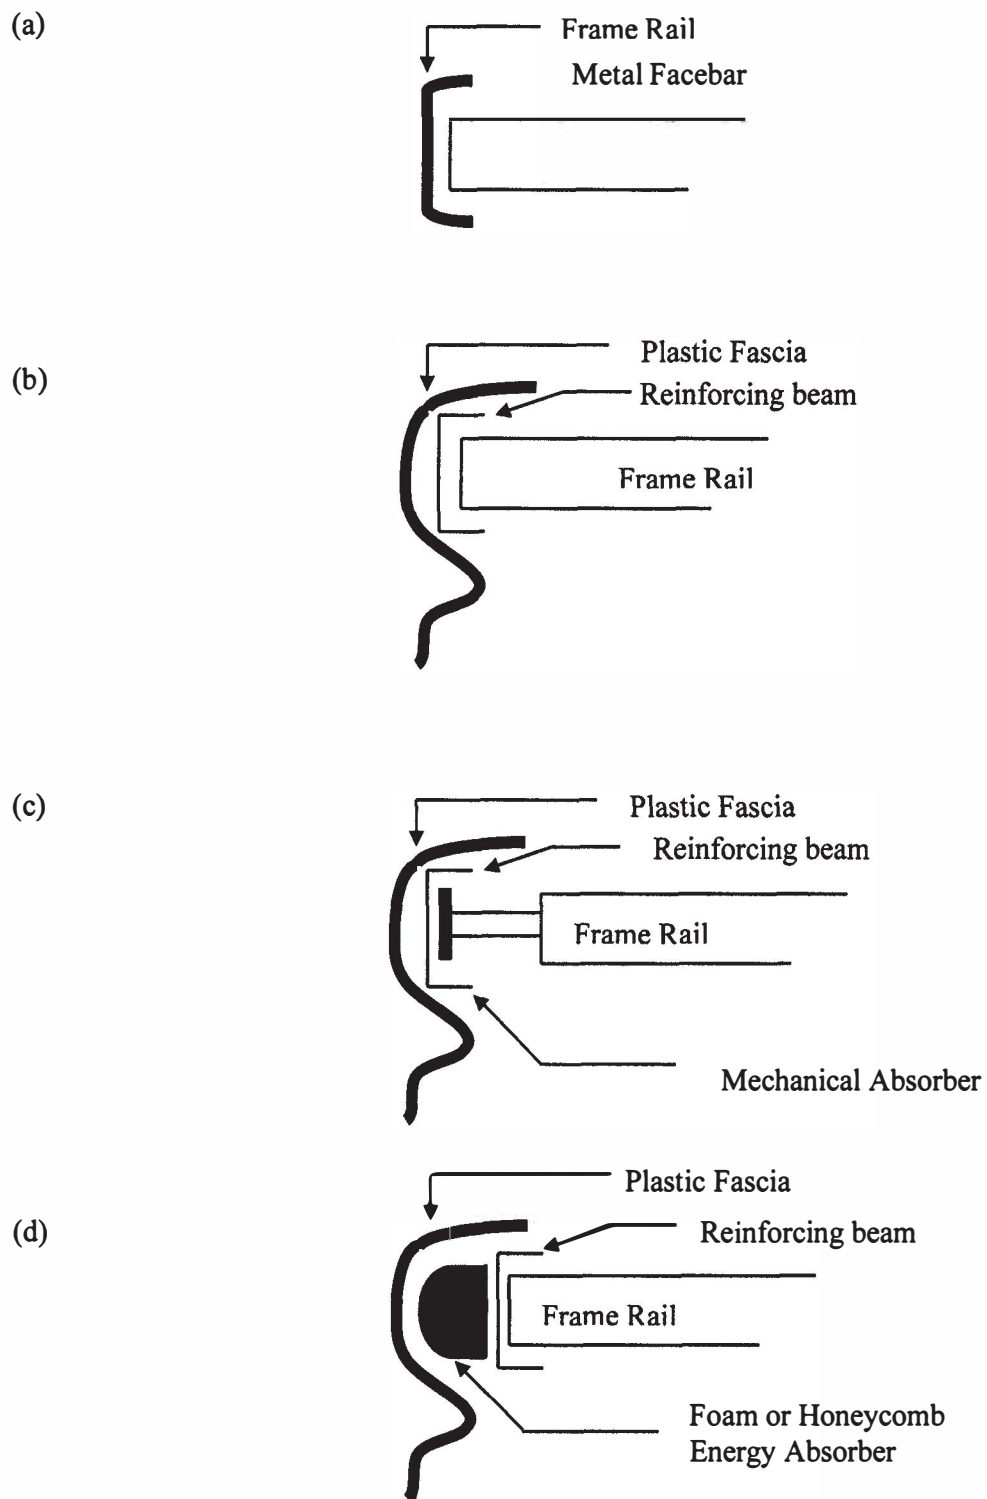


Figure 2.1: Four different types of automotive bumper systems: a) Metal facebar system, b) Plastic fascia and reinforcing beam system, c) and d) Plastic fascia, reinforcing beam and energy absorbers (Bernert et al., 2001).

2.2.1 Metal Face Bar System

A metal face bar system consists of a single metallic bumper that decorates the front or rear end of a vehicle and acts as the primary energy absorber in a collision. The bumper regulations in the United States require passenger cars to withstand a 4 km/h impact at the curb position plus or minus 50 mm with no visual damage and no damage to safety related items. The Canadian passenger car regulations call for an 8 km/h impact, however limited damage is permitted. The North American OEM's voluntarily design their passenger car bumpers to withstand a 8 km/h impact with no visual damage and no damage to safety items. Current face bar systems can only withstand a 4 km/h impact at the curb position plus or minus 50 mm with no visual damage and no damage to safety items. For this reason, the use of current face bar systems is restricted to light trucks. The aesthetics of face bars matches the styling trend for full size vans, pickups and sport utilities. Thus, most face bars are presently being applied to these vehicles.

If the design standard for light truck bumpers were to rise to the 8 km/h voluntary passenger car standard, then the face bar systems used on full size vans, pickups and sport utilities would have to be redesigned. For the reason of weight, such redesigns would likely revert to systems that employ a reinforcing beam (Bernert et al., 2001).

2.2.2 Plastic Fascia and Reinforcing Beam System

This system consists of a plastic fascia and a reinforcing beam, which is fastened directly to the vehicle frame or motor compartment rails (Figure 2.1b). It is primarily used in Europe and Japan, where bumper regulations are less stringent than those in North America. On many vehicles in Europe and Japan, the reinforcing beam in this system also serves as the first structural cross-member. While this arrangement leads to a small sacrifice in bumper performance, it increases vehicle crashworthiness. If the reinforcing beam is a part of the body-in-white, the favoured material is steel because of the structural requirements associated with a cross-member. Also, steel is fully compatible with the body in white E- coat and paint systems used by the OEM's plastic fascia, reinforcing beam and energy absorption system.

2.2.3 Plastic Fascia, Reinforcing Beam and Mechanical Energy Absorbers System

Bumper systems with a plastic fascia, reinforcing beam and energy absorption are shown in Figures 2.1c and 2.1d. These readily meet the 8 km/h voluntary bumper standard set by the North American OEM's. All passenger cars and most minivans around the world have this type of system with small variations of the method of energy absorption. Energy can be absorbed by a mechanical absorber (Figure 2.1c), foam or honeycomb (Figure 2.1d), or by the reinforcing beam itself (Bernert et al., 2001).

2.2.4 Plastic Fascia, Reinforcing Beam and Energy Absorption System

A bumper system consists of three components (as shown in Figure 2.2) such as, fascia, and energy absorber and bumper beam. A brief description of the components is furnished in the following sub-sections.

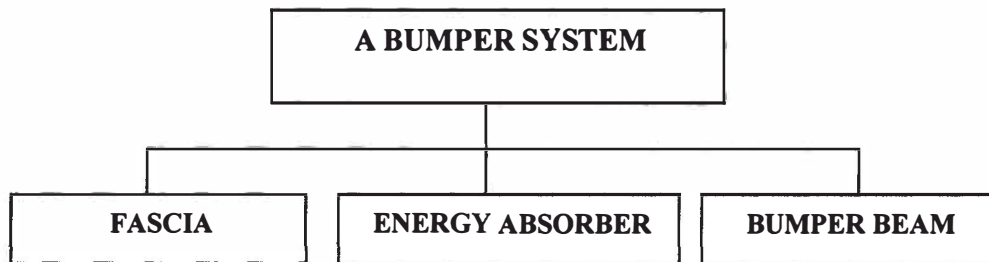


Figure 2.2: Automotive bumper system components

2.2.5 Fascia

Bumper fascia is designed to meet several requirements. It must be aerodynamic to control the flow of the air around the car and the amount of air entering the engine compartment. It should be aesthetically pleasing to the consumer. Typical fascia as shown in figure 4.3 is styled with many curves and ridges to give bumper dimension and to distinguish vehicles from competing models. Another requirement of bumper fascia is easy fabrication. It is also important for it to be light in weight. Virtually fascia is made from one of three materials: polypropylene, polyurethane or polycarbonate (Bernert et al., 2001).